



# SLEEPY HOLLOW STATE PARK

## CONSTRUCTION PLANS FOR PRICE ROAD RELOCATION PROJECT NO. 24-0216

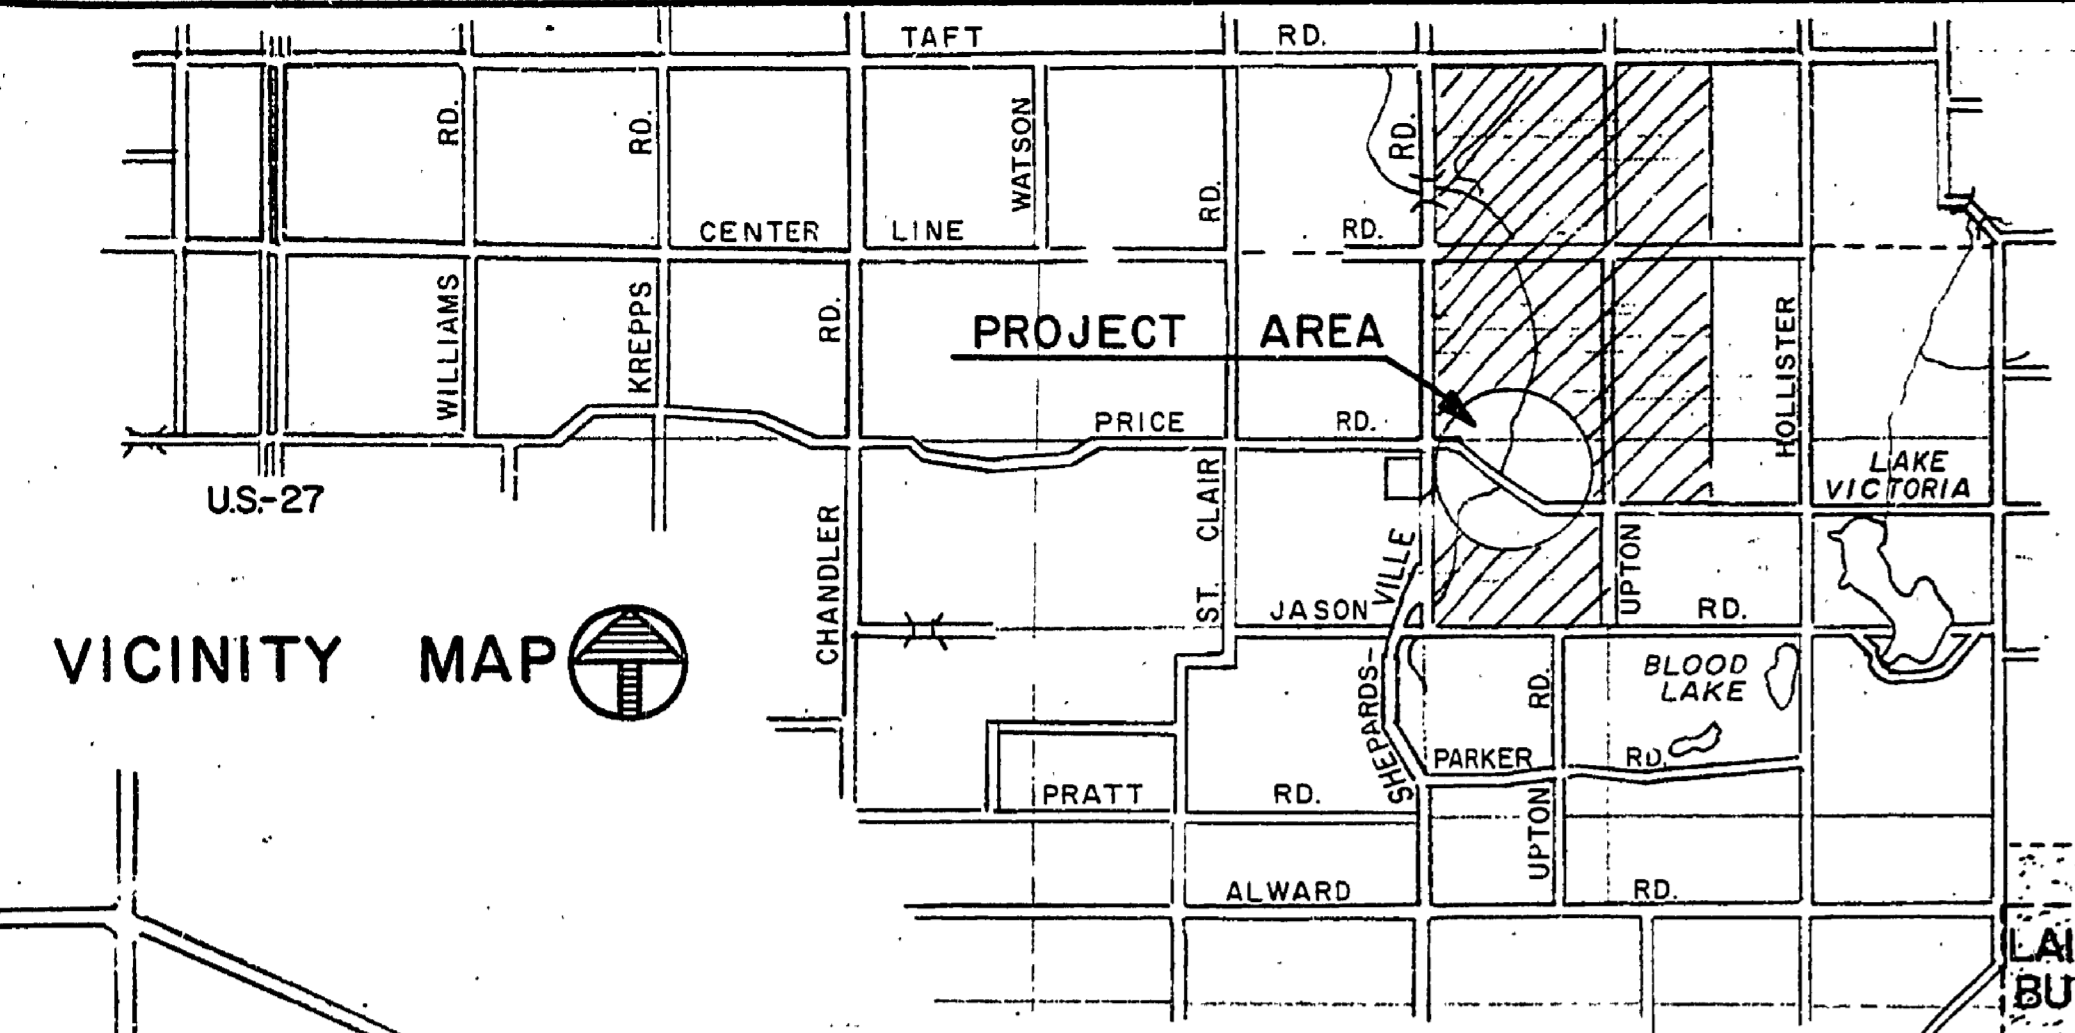

VICINITY MAP

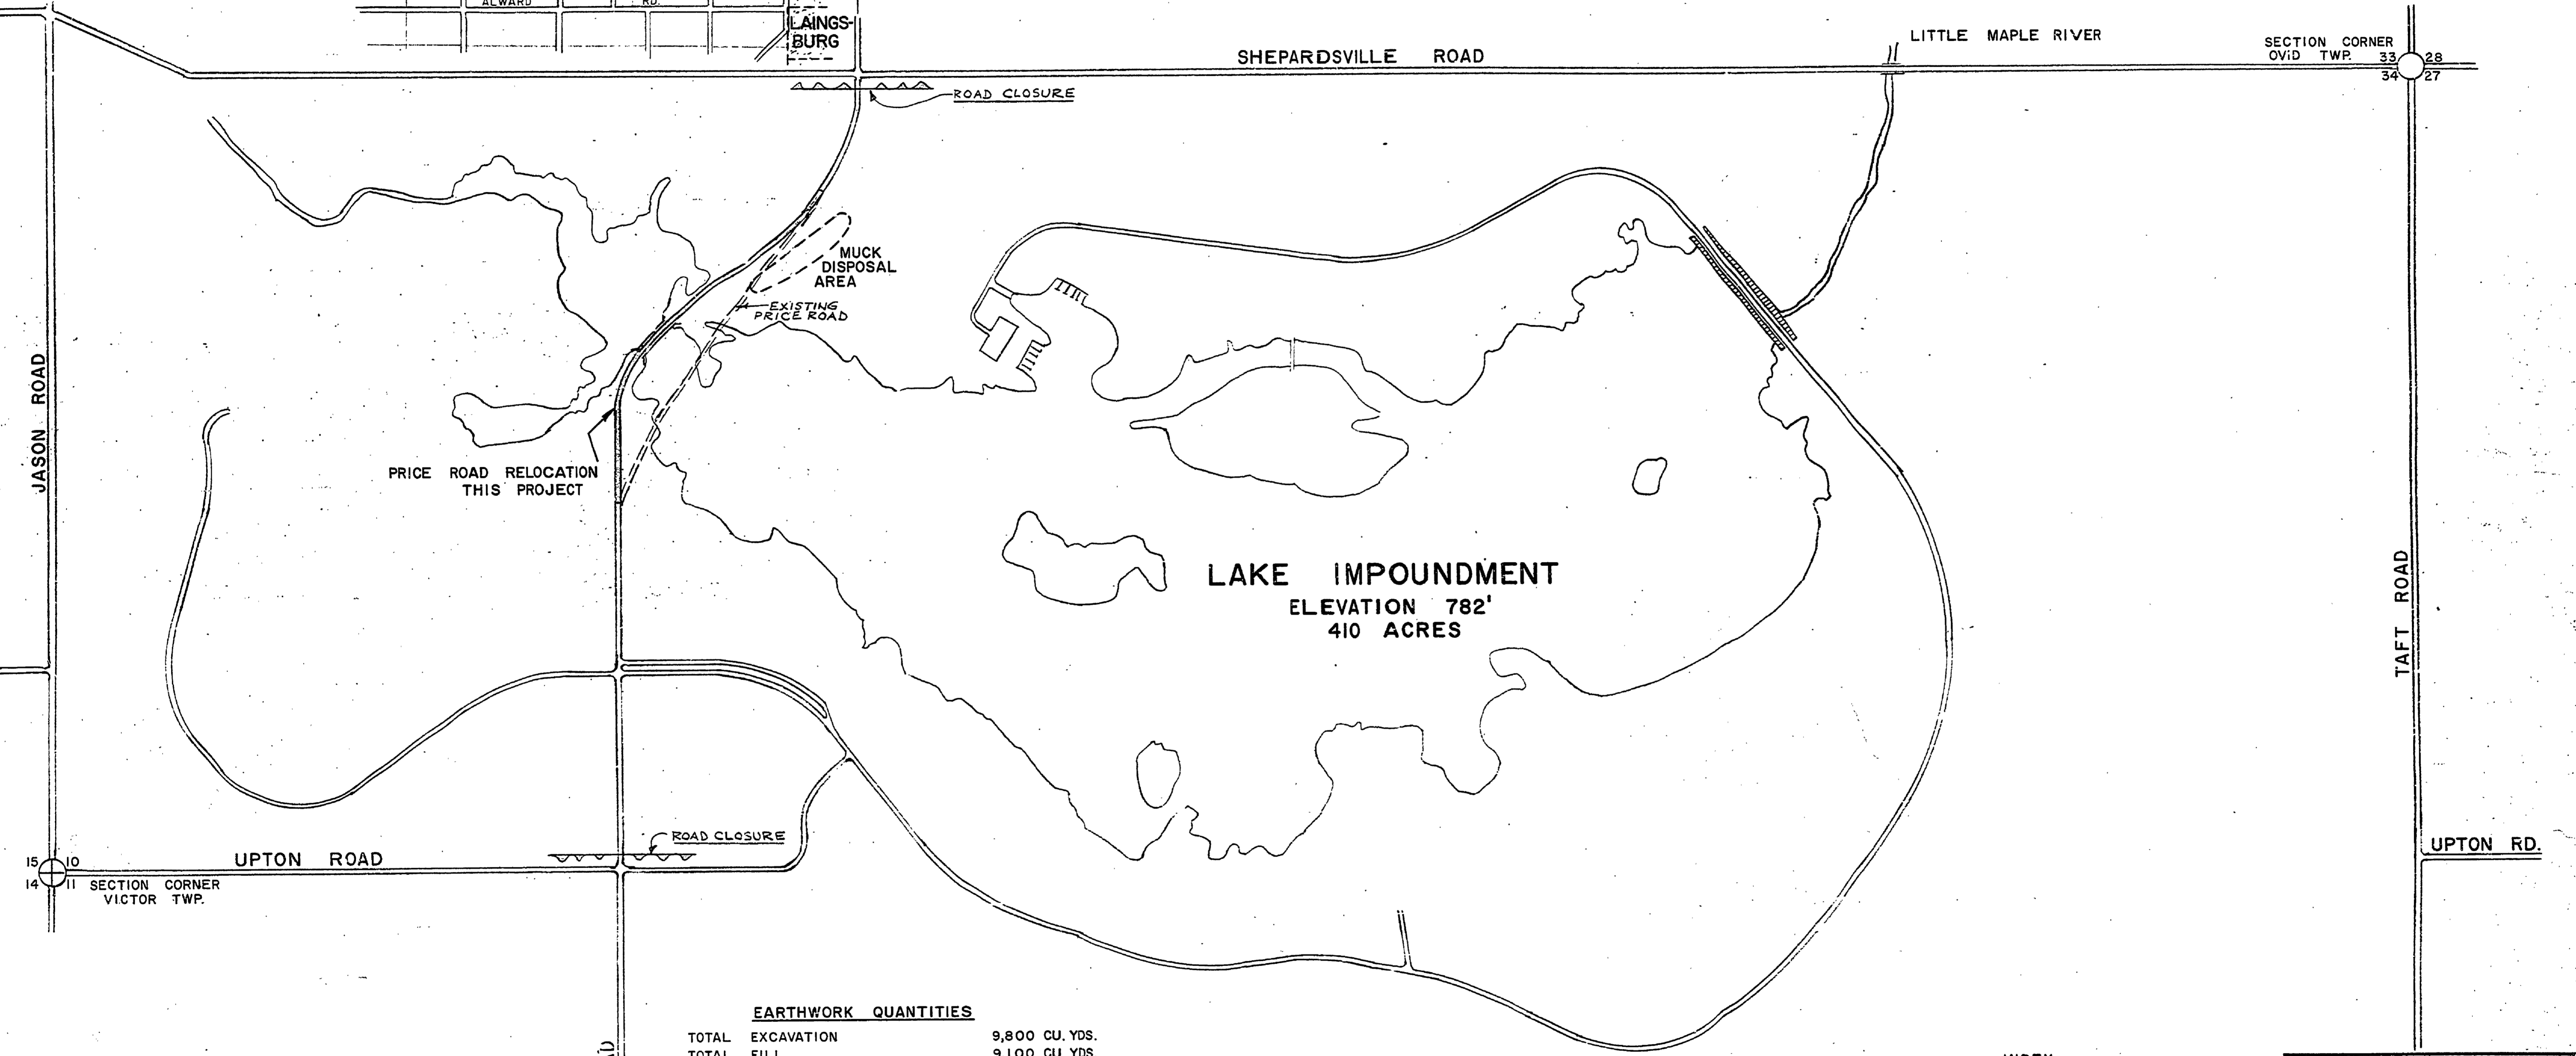

**EARTHWORK QUANTITIES**

TOTAL EXCAVATION	9,800 CU. YDS.
TOTAL FILL	9,100 CU. YDS.
TOTAL EXCESS CUT	700 CU. YDS.
TOTAL MUCK EXCAVATION (WASTE) (STA. 13+70 TO STA. 15+70) HAUL TO DISPOSAL AREA	1,600 CU. YDS.

**NOTE:**  
THE EARTHWORK QUANTITIES SHOWN ON THESE PLANS INCLUDE 20% FOR SHRINKAGE AND HAVE BEEN CAREFULLY ESTIMATED, BUT ARE NOT GUARANTEED, AND ARE NOT TO BE USED AS A BASIS FOR PAYMENT.

**PLAN**  
SCALE: 1" = 500'

**INDEX**

SHEET	DESCRIPTION
1	COVER SHEET
2	PRICE ROAD RELOCATION - PLAN & PROFILE
3	PRICE ROAD RELOCATION - PLAN & PROFILE
4	PRICE ROAD RELOCATION & GUARD POST DETAILS
5	PRICE ROAD RELOCATION - PLAN
6	PRICE ROAD RELOCATION - PROFILE OF CSP

CONSTRUCT TURNAROUND  
(SEE DETAIL SHEET #4)

BUILDING COMMITTEE APPROVAL	
BY: _____	DATE: _____
RECOMMENDED FOR APPROVAL: <i>J. E. Barber</i> 9-7-71	
RECOMMENDED FOR APPROVAL: <i>S. P. ...</i> 9-8-71	
DIVISION/REGION APPROVAL	
BY: <i>D. Schweichardt</i>	DATE: _____
ENGINEERING DIVISION	
APPROVED: <i>H. E. ...</i>	DATE: 10-7-71

SURVEYED BY A. PETRAVICIUS	6-71	DRAWN BY	NO. DATE BY	REVISIONS	NO. DATE BY	REVISIONS	MICHIGAN DEPARTMENT OF NATURAL RESOURCES	<b>COVER SHEET</b> SHEET TITLE	SLEEPY HOLLOW STATE PARK AREA OR PARK	PROJECT NO. 24-0216
DESIGNED BY A. PETRAVICIUS	7-71	CHECKED BY	1. _____		3. _____				PRICE ROAD RELOCATION	SHEET 1 OF 6
	DATE		2. _____		4. _____					PLAN NO. E-100