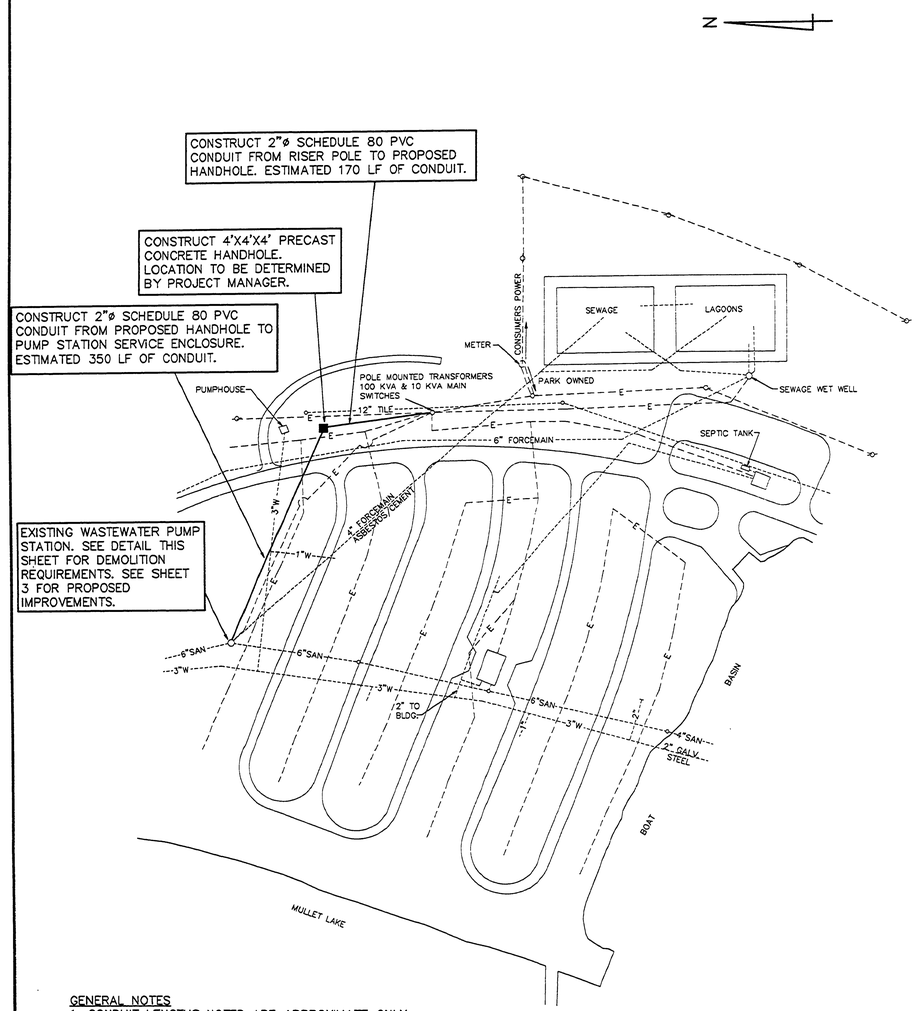


GENERAL NOTES

1. CONDUIT LENGTHS NOTED ARE APPROXIMATE ONLY. FIELD VERIFY. NO CHANGE IN THE LUMP SUM PRICE WILL BE MADE FOR AS CONSTRUCTED QUANTITIES IN EXCESS OF PLAN QUANTITIES.
2. THE CONTRACTOR SHALL PROTECT ALL EXISTING UTILITIES DURING EXCAVATION OF THE PROPOSED CONDUIT TO THE PUMP STATION.
3. CROSSING OF THE EXISTING BITUMINOUS ROADWAY WITH THE PROPOSED CONDUIT MAY BE PERFORMED BY EITHER BORING OR OPEN CUTTING AT THE CONTRACTOR'S OPTION.

## PUMP STATION SITE MAP

NO SCALE

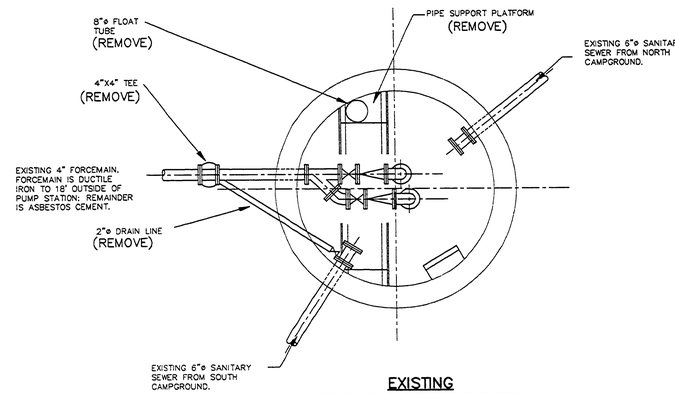


## EXISTING PLAN WITH TOP REMOVED

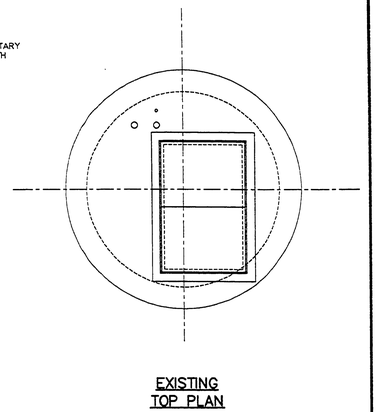

## EXISTING TOP PLAN

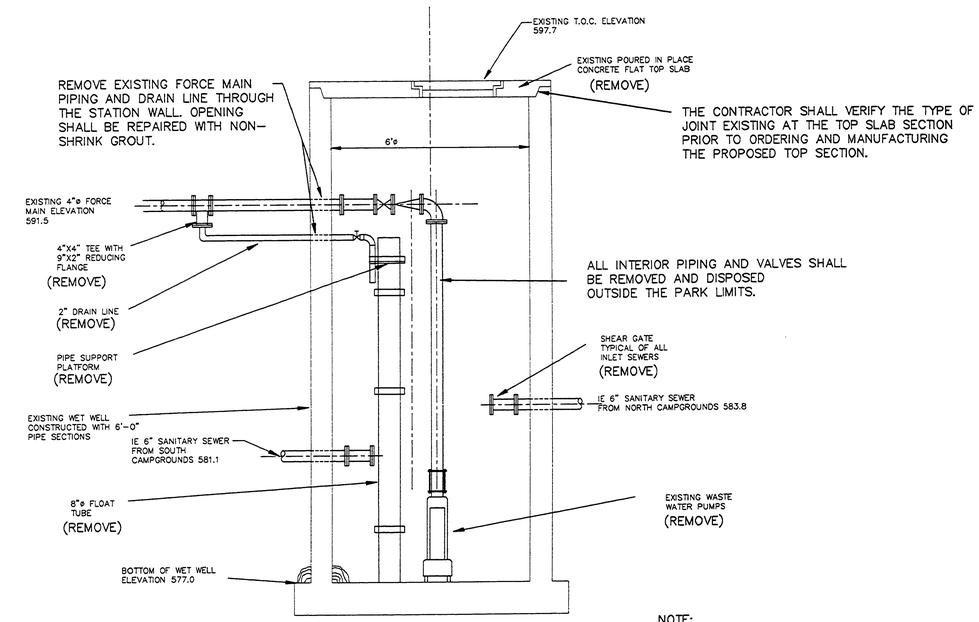


## EXISTING PUMP STATION SECTION

NOTE:
THE CONTRACTOR SHALL NOTE THAT UPON REMOVAL OF THE EXISTING PIPING AND PUMPS AND THE PUMPING DOWN OF SEWAGE IN THE EXISTING PUMP STATION, THE PUMP STATION STRUCTURE WILL BE SUBJECT TO UPLIFT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING THE EXISTING PUMP STATION STRUCTURE DURING CONSTRUCTION AND SHALL SUBMIT HIS PROPOSED METHOD OF PROTECTING THE STRUCTURE FROM UPLIFT TO THE PROJECT MANAGER FOR REVIEW.

L-115

2-14-91
015PUMP

| | |
|---|---|
| DRN BY: | SAH |
| DES'D. BY: | GJF |
| CK'D BY: | GDA |
| APP'D BY: | |

Capital Consultants, Inc.
ENGINEERS
500 N. WASHINGTON AVE. LANSING, MICHIGAN 48906 TELEPHONE 517-371-1200

STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
Office of Facilities

QUALITY OF LIFE RECREATION BOND
MICHIGAN DEPARTMENT OF NATURAL RESOURCES
PARKS DIVISION – STATE ACCT. NO. 607-75-2450-400

ALOHA STATE PARK
PUMP STATION SITE PLAN AND DETAILS
PUMP STATION NO. 1

SCALE: AS SHOWN
PROJ. NO.: 90134
SHEET 2 OF 4