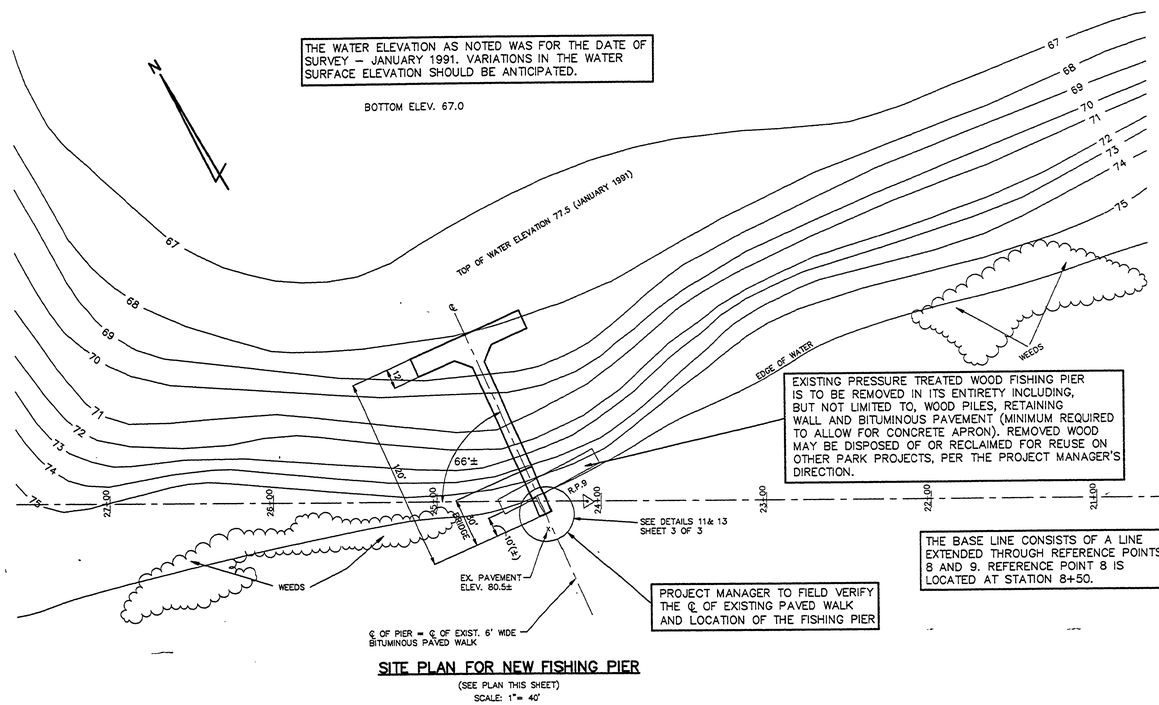

THE WATER ELEVATION AS NOTED WAS FOR THE DATE OF SURVEY – JANUARY 1991. VARIATIONS IN THE WATER SURFACE ELEVATION SHOULD BE ANTICIPATED.

BOTTOM ELEV. 67.0

EXISTING PRESSURE TREATED WOOD FISHING PIER IS TO BE REMOVED IN ITS ENTIRETY INCLUDING, BUT NOT LIMITED TO, WOOD PILES, RETAINING WALL AND BITUMINOUS PAVEMENT (MINIMUM REQUIRED TO ALLOW FOR CONCRETE APRON). REMOVED WOOD MAY BE DISPOSED OF OR RECLAIMED FOR REUSE ON OTHER PARK PROJECTS, PER THE PROJECT MANAGER'S DIRECTION.

PROJECT MANAGER TO FIELD VERIFY THE ℄ OF EXISTING PAVED WALK AND LOCATION OF THE FISHING PIER

THE BASE LINE CONSISTS OF A LINE EXTENDED THROUGH REFERENCE POINTS 8 AND 9. REFERENCE POINT 8 IS LOCATED AT STATION 8+50.

SITE PLAN FOR NEW FISHING PIER

(SEE PLAN THIS SHEET)
SCALE: 1"= 40'

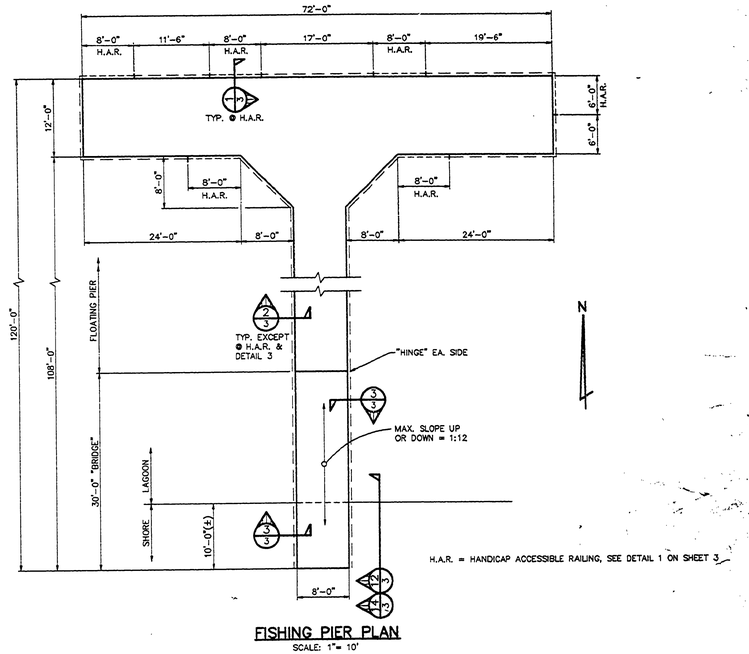

H.A.R. = HANDICAP ACCESSIBLE RAILING, SEE DETAIL 1 ON SHEET 3

FISHING PIER PLAN

SCALE: 1"= 10'

R.P. #	COORD'S
8	N 2916.85 E 339.53
9	N 3698.798 E –1009.714

WITNESSES TO R.P.

R.P. #9 (1/2" BAR)
SET NAIL AND TAG SOUTH SIDE 9" MAPLE, S50°W, 16.11'
SET NAIL AND TAG EAST SIDE 8" ASH, SOUTH, 30.73'

ALL ELEVATIONS ARE 500.00 FEET PLUS.

TREES NOT SHOWN

UNDERGROUND UTILITIES NOT SHOWN

±3' OF LOOSE SILT ON TOP OF BOTTOM OF LAKE ELEVATIONS AT ALL POINTS VISIBLE.

THE FOLLOWING "MEAN MONTHLY WATER LEVEL" DATA WAS OBTAINED FROM THE NOAA MONITORING STATION (#5034/#5035) @ THE MOUTH OF THE SAGINAW RIVER IN ESSEXVILLE, MICHIGAN FOR THE PERIOD OF JANUARY 1976 THROUGH SEPTEMBER 1991.

HIGH	581.59' (OCTOBER 1986)
LOW	577.14' (JANUARY 1990)
JANUARY 1991	577.82'

DRN BY:	–
DESD. BY:	–
CKD BY:	–
APP'D BY:	–

Capital Consultants, Inc.
ENGINEERS
600 N. WASHINGTON AVE., LANSING, MICHIGAN 48906 TELEPHONE 517-371-1300

STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
Office of Facilities

QUALITY OF LIFE RECREATION BOND
MICHIGAN DEPARTMENT OF NATURAL RESOURCES
PARKS DIVISION – STATE ACCT. NO. 607–75–2450–400

BAY CITY STATE PARK
TOBICO LAGOON FISHING PIER
SITE PLAN AND DETAILS

SCALE: AS SHOWN
PROJ. NO.: 90135
SHEET 2 OF 3

L-136

FILE NO.: 0506P3D
PLOT DATE: 2-27-92
UPDATED BY: RLB