R-1638 COMMERCIAL BLUEPRINT SERVICE 12-70 43046

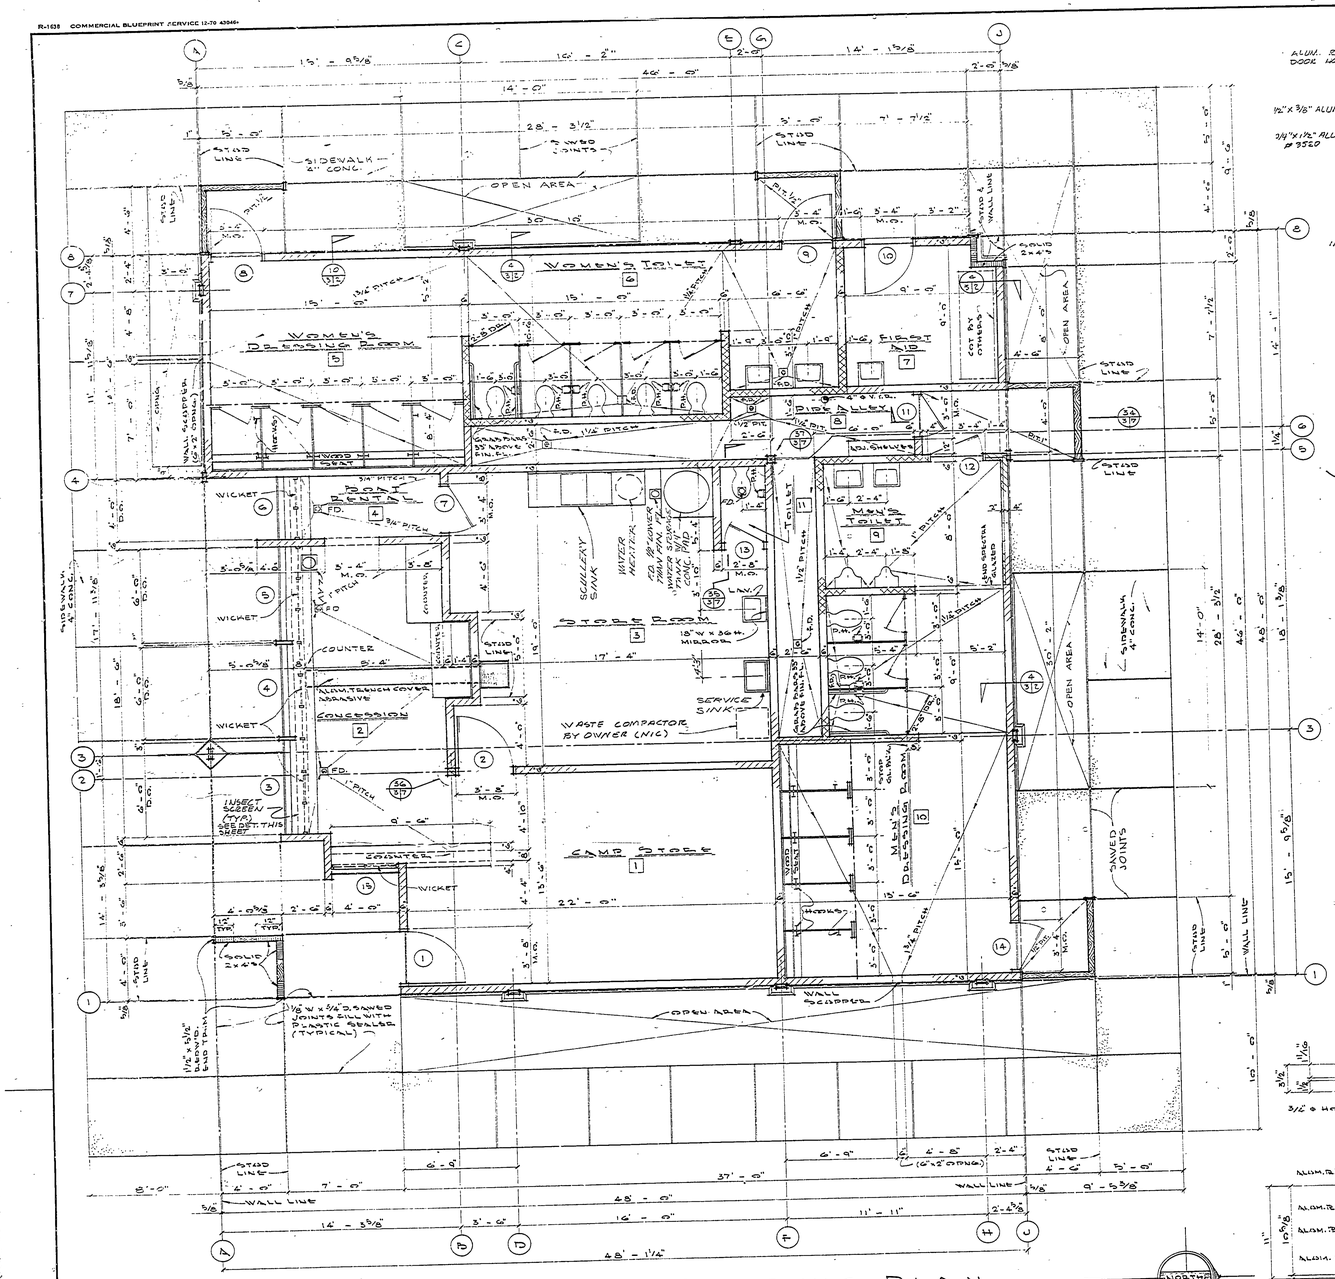

NOTE: DESIGN TAKEN FROM KANE MANUF. CORP.

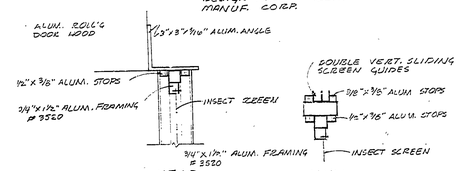

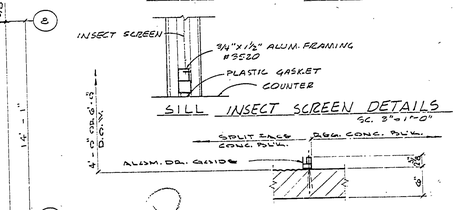

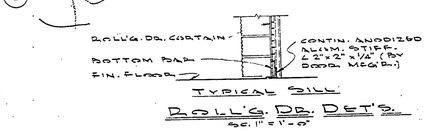

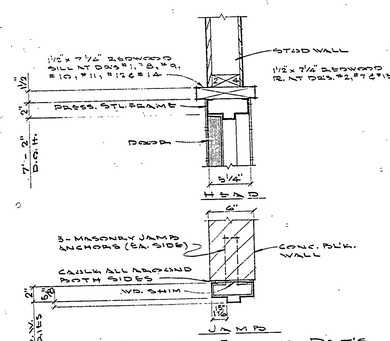

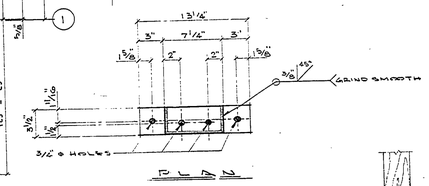

ROOM FINISH SCHEDULE

ROOM NAME	NO.	FLOOR	BASE	WALL	CEIL'G	REMARKS
CAMP STORE	1.	CONCRETE W/ HARDENER	INTEGRAL CONC. BASE	PAINTED CONC. BLK.	PAINTED CONC. BLK.	NOTE: STAIN ALL WOOD WINDOW TRIM, CHANGE BOOTH PLANTERS & PLYWD. ENTRANCE SCREENS.
CONCESSION	2.					
STORE ROOM	3.					
FRONT DENTAL	4.					M.D.O. PLYWD. CHANGE BOOTH PAINT PAINT
WOMEN'S DRESSING ROOM	5.					
WOMEN'S TOILET	6					
FIRST AID	7.					
PIPE ALLEY	8.					
MEN'S TOILET	9.					
MEN'S DRESSING ROOM	10.					M.D.O. PLYWD. CHANGE BOOTH PAINT PAINT
TOILET	11.					

DOOR SCHEDULE

DR. NO.	TYPE	SIZE OF OPNG.	MATERIAL	FRAME	CLOSER	REMARKS
1.	A	3' - 4" x 7' - 2"	1 3/4" THK. PRESS. STL.	PRESS. STL.	1-REQ'D.	18" HIGH KICK PL.
2.	C	3' - 4" x 7' - 2"	1 3/4" THK. PRESS. STL.	PRESS. STL.		18" HIGH KICK PL.
3.	E	6' - 0" x 7' - 2"	ALUMINIZED STL.	ALUM. GUIDES		
4.	E	6' - 0" x 7' - 2"	ALUMINIZED STL.	ALUM. GUIDES		
5.	E	6' - 0" x 7' - 2"	ALUMINIZED STL.	ALUM. GUIDES		
6.	E	4' - 0" x 7' - 2"	ALUMINIZED STL.	ALUM. GUIDES		
7.	C	3' - 0" x 7' - 2"	1 3/4" THK. PRESS. STL.	PRESS. STL.		
8.	B	3' - 0" x 7' - 2"	1 3/4" THK. PRESS. STL.	PRESS. STL.	1-REQ'D.	
9.	B	3' - 0" x 7' - 2"	1 3/4" THK. PRESS. STL.	PRESS. STL.	1-REQ'D.	
10.	C	3' - 0" x 7' - 2"	1 3/4" THK. PRESS. STL.	PRESS. STL.		
11.	C	2' - 8" x 7' - 2"	1 3/4" THK. PRESS. STL.	PRESS. STL.		
12.	B	3' - 0" x 7' - 2"	1 3/4" THK. PRESS. STL.	PRESS. STL.	1-REQ'D.	
13.	D	2' - 4" x 7' - 2"	1 3/4" THK. PRESS. STL.	PRESS. STL.	1-REQ'D.	
14.	B	3' - 0" x 7' - 2"	1 3/4" THK. PRESS. STL.	PRESS. STL.	1-REQ'D.	
15.	E	4' - 0" x 7' - 2"	ALUMINIZED STL.	ALUM. GUIDES		

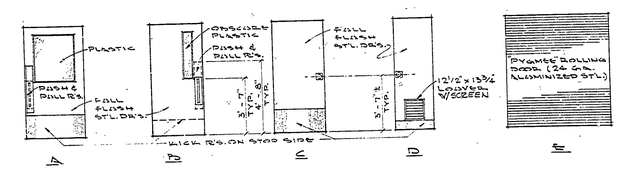

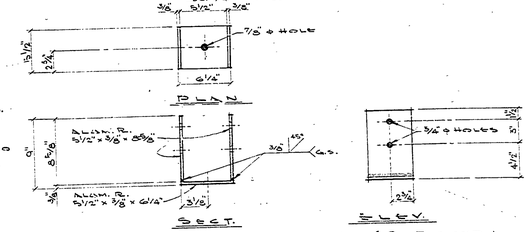

SURVEYED BY		DRAWN BY	12/72	NO.	DATE	BY	REVISIONS	NO.	DATE	BY	REVISIONS
DESIGNED BY	12/70 DATE	CHECKED BY	12/72 DATE	1.				3.			
				2.				4.			

MICHIGAN
DEPARTMENT OF NATURAL RESOURCES

FLOOR PLAN, DETAILS & SCHEDULES
SHEET TITLE

AREA OR PARK: VAN BUREN STATE PARK
PROJECT: BEACHHOUSE

PROJECT NO. 24-1224
SHEET 3 OF 9
PLAN NO. A-104